



STELRON

COMPONENTS...


Building Blocks for Automation

DESIGN YOUR PARTS HANDLING

AROUND STELRON COMPONENTS...





Stelron RWB Chassis
Accuracy $\pm .0015$
Speeds up to 100 rpm

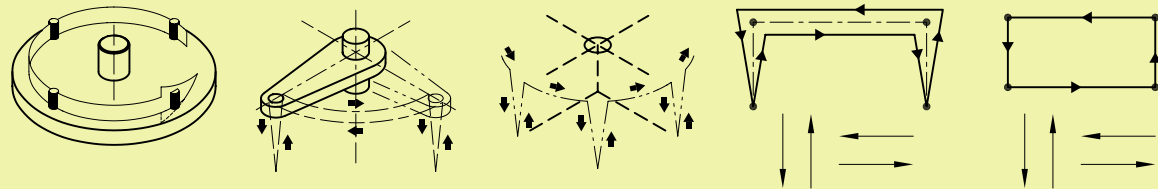

Vari-Pak

Cam actuated linear "Pick and Place" with adjustable or fixed strokes. Five sizes are available with maximum strokes up to 16" in the "X" axis and 6" in the "Y" axis.





Translator

X-Y "Pick and Place," "Walking Beam" parts handler is available in seven sizes with maximum strokes up to 12" in the "X" axis and 5" in the "Y" axis.

Indexer

Low profile Cam Indexer with optional "shot pin" attachment for accuracy of $\pm .0007$ @ shot pin radius. Standard index positions range from 2 stops to 32 stops with multiple index periods available.

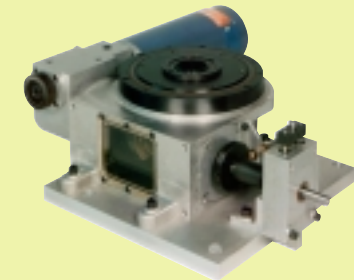

Trans-part

Rotary/linear "Pick and Place" for machine loading/unloading is available in six sizes with linear strokes up to 10" and angular strokes up to 180 degrees.

Visit our Website at www.stelron.com